

NEW

HJW

Heavy Duty Joystick



HJW

Heavy Duty Joystick






Thanks to its strong mechanical structure and advanced electronic design, this new Hall Effect joystick is suitable for harsh environments and safety applications. The joystick mechanical and electrical life reaches 3 million cycles on each axis. It is possible to customize the actuating force and the pre-feeling of each axis with the 4 independent plungers and springs. With the Deutsch connectors and the electronic board potted with resin, the joystick base is completely sealed (IP67/IPx9K). As option the electromagnetic detent of each axis, is available. With the high number of input pins, the electronic board can collect all the signals of the handle (thumbwheels, push buttons, rocker switches, ...) and send them over the CANbus network with SAE J1939, CanOpen, CanOpen Safety or ISOBUS protocol. The electronic board of the joystick is designed with Hardware Category 2 and is capable of reach Performance Level D / SIL 2.

- Hall effect contactless sensor
- Suitable for Safety applications
- Rugged construction suitable for all Walvoil handles
- Electromagnetic detent option


Working conditions		
Electrical specifications		
Supply voltage (VBB)		From 8 to 32 V
Max. supply current	without grip	100 mA (no load)
CAN bus Output		SAEJ1939, CanOpen, CanOpen Safety, ISOBUS
Mechanical specifications		
Mechanical and Electrical life		3.000.000 cycles
Lever angle	operation	±18° for axis
Environmental specifications		
Temperature operating		from -40° C to 85° C - from -40° F to 185° F
Storage temperature		from -40° C to 100° C - from -40° F to 212° F
Weather protection		IP 67/IPx9K
EMC		according to ISO 14982 /13766

NEW

Dimensions and pin-out connectors

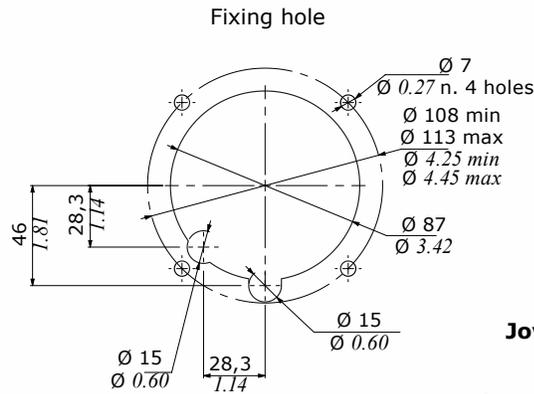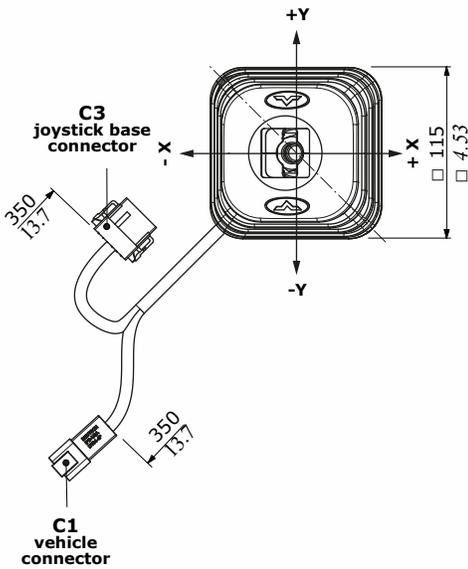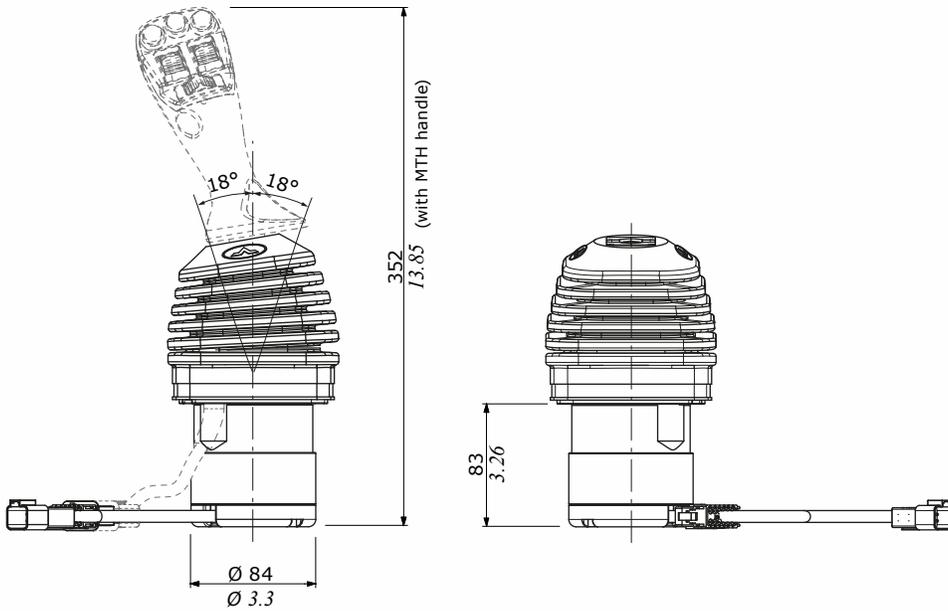


PINOUT C3 CONNECTOR
DEUTSCH DTM06-12SA




PIN	COLOR	FUNCTION
1	White/blue	5V out
2	Brown	GND
3	White	Analog input 1
4	Red	Analog input 2
5	Orange	Analog input 3
6	Yellow	Analog input 4
7	Green	Analog input 5
8	Grey	Analog input 6
9	Blue	Analog input 7
10	-	Not connected
11	-	Not connected
12	-	Not connected

PINOUT C1 CONNECTOR
DEUTSCH DT04-4P



PIN	COLOR	FUNCTION
1	Red	VBB
2	Yellow	CAN_H
3	Green	CAN_L
4	Black	GND

Joystick axes actuation forces
(typical example)

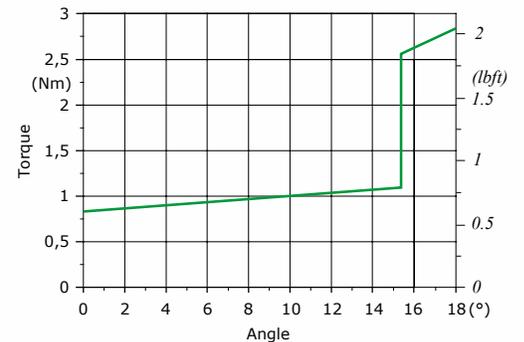

 **walvoil**
FLUID POWER EMOTION



D1WWCE12A - 1st edition March 2019

Walvoil S.P.A. • 42124 Reggio Emilia • Italy • Via Adige, 13/D • Tel. +39.0522.932411 • Fax +39.0522.300984
www.walvoil.com

